




Street Light

100 W / 120 W

OB230c



Beam Angle : 330°

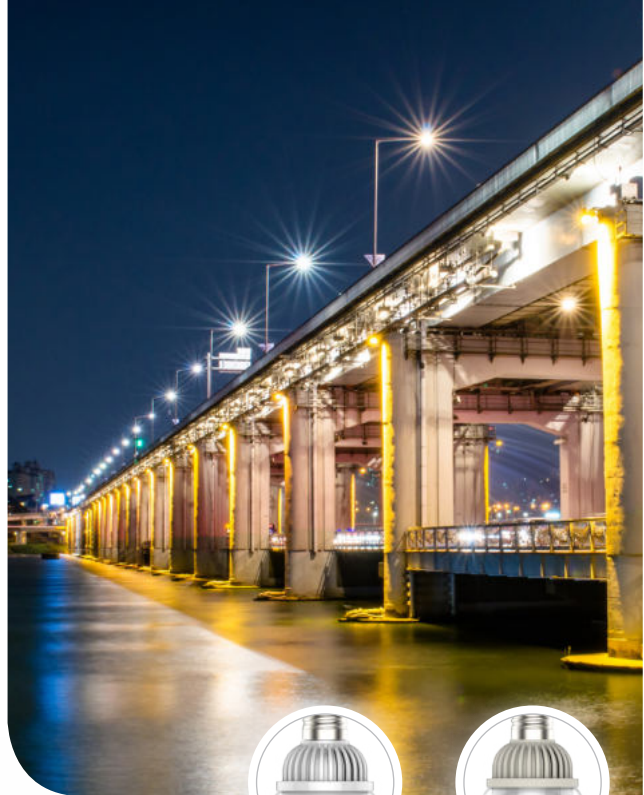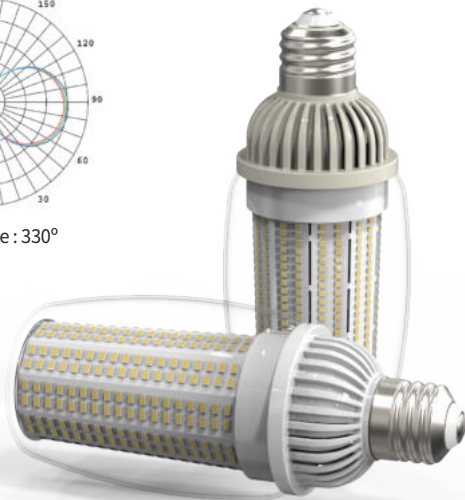

100 W : Polycarbonate



120 W : PA6



LED HIGH BAY

LED FLOOD LIGHT

LED BULB


DIMENSION

100 W

- Size : $\varnothing 99 \times 227$ mm
- Weight : 420 g

120 W

- Size : $\varnothing 99 \times 227$ mm
- Weight : 445 g



FEATURES

- Optimized for street light and replaceable conventional light
- LED replacement for 250~400W Metal Halide lamp
- Ultra-high efficacy of 150 lm/W
- Clear type cover enables greater brightness
- Mesh application to prevent the inflow of foreign substances
- Patented Fin Plate Technology improved air-cooling heat dissipation
- Ultraviolet free, no mercury and lead-free RoHS Compliance

SPECIFICATION

Model No.	Wattage	Replacement	Luminous Efficacy	Total Lumen	CRI	CCT	Voltage	Frequency
OB230c-100W	100 W	MH 250-350 W	145 lm/W	14,500 lm	80 Ra	5,700 K	AC 120-277 V	50/60 Hz
OB230c-120W	120 W	MH 350-400 W	150 lm/W	18,000 lm				

- PF : > 0.96
- THD : < 15 %
- Material : Polycarbonate, PA6

- Socket : E39/40
- Operating Temperature : -20°C ~ 50°C (-4°F ~ 122°F)
- Installation Angle : 360°

- CCT : Standard - 5700 K, 3000 K / Option - 5000 K, 4000 K, 2700 K
- LED Package Life time : 50,000 hours (25°C)
- *LED package life time according to industry standard (LM80), high operating temperature may shorten life span of LED package and LED lamp.

APPLICATION



Street/Road



Bridge



Residential Area



Outdoor Parking Lot



Mesh Structure

*Illustrated by : OB200c

Mesh application to prevent the inflow of foreign substances



LIGHTING FIXTURE

① Recommended



Cutoff streetlight



Fully shieldedtype



Fully shieldedtype



Fully shieldedtype



Downward type




Horizontal light fixture

② Unsuitable



Small fixture



Unshielded Shade



Downlight