


600 W / 700 W

CT8000



DIMENSION

- Size : ϕ 408 x 485 mm
- Weight : 20 kg

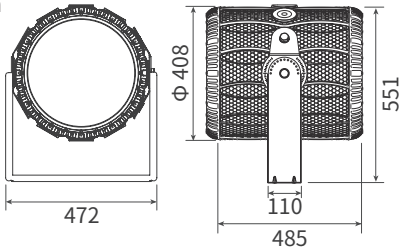

FEATURES

- Driver embedded High output LED Floodlight
- IP67 rated for outdoor waterproof usage
- Electricity saving up to 60% than conventional lighting
- Various lens options to achieve the optimal illumination
- Compact & smooth design with 360° installation angle
- Superb heat dissipation through ICEPIPE FDP Technology
- Corrosion-resistant, durable polycarbonate covers
- Ultraviolet free, no mercury and lead-free RoHS Compliance

SPECIFICATION

Model No.	Wattage	Replacement	Luminous Efficacy	Total Lumen	CRI	CCT	Voltage	Frequency
CT8000-600W	600 W	MH 1-1.2 kW	115 lm/W	69,000 lm	75 Ra	5,700 K	AC 200-277 V	50/60 Hz
CT8000-700W	700 W	MH 1-1.5 kW	115 lm/W	80,500 lm				

- PF : > 0.96
- THD : < 15 %
- Surge withstand capability : 4 kV
- IP Rating : IP67

- Material : Polycarbonate
- Heatsink : Copper ICEPIPE Heatsink
- Operating Temperature : -30°C ~ 50°C (-22°F ~ 122°F)
- Installation Angle : 360°

- CCT : Standard - 5700 K, 3000 K / Option - 5000 K, 4000 K, 2700 K
- LED Package Life time : 50,000 hours (25°C)
- *LED package life time according to industry standard (LM80), high operating temperature may shorten life span of LED package and LED lamp.


APPLICATION



Golf Course



Outdoor Sports Facilities



Port



Building Exterior

Beam Angle

Standard Lens	Lens					Diffuser Plate 2
						
						
30°	15°	20°	45°	60°	120°	