

External Driver

400 W / 450 W

# RCT




Option Sun visor



## DIMENSION

- Size : 515 x 171 x 326 mm
- Weight : 10.5 kg (Driver not incl.)

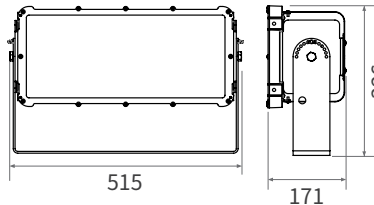

## FEATURES

- External driver for safe & easy repair
- Replace MH 1~1.2kW
- Excellent heat dissipation by ICEPIPE FDP technology
- Improved durability by metal housing & glass cover
- Various lens options (20°~120°)
- IP67 (driver & lamp) for outdoor use
- Eco-friendly & RoHS compliant (UV/Lead/Mercury-free)

## SPECIFICATION

| Model No. | Wattage | Replacement | Luminous Efficacy | Total Lumen | CRI   | CCT     | Voltage      | Frequency |
|-----------|---------|-------------|-------------------|-------------|-------|---------|--------------|-----------|
| RCT-400   | 400 W   | MH 1 kW     | 145 lm/W          | 58,000 lm   | 80 Ra | 5,700 K | AC 100-240 V | 50/60 Hz  |
| RCT-450   | 450 W   | MH 1.2 kW   | 145 lm/W          | 65,250 lm   |       |         |              |           |
| RCT-400C  | 400 W   | MH 1 kW     | 140 lm/W          | 56,000 lm   | 75 Ra |         |              |           |
| RCT-450C  | 450 W   | MH 1.2 kW   | 140 lm/W          | 63,000 lm   |       |         |              |           |

- PF : > 0.9
- THD : < 15 %
- Surge withstand capability : 6 kV
- IP Rating : IP67

- Material : Steel
- Heatsink : Copper ICEPIPE Heatsink
- Operating Temperature : -30°C ~ 50°C (-22°F ~ 122°F)
- Installation Angle : 360°

- External Driver : 480W x 1EA (3 in 1 dimming: 0-10V/PWM/3-Timer-Modes)
  - CCT : Standard - 5700 K / Option - 5000 K, 4000 K, 3000 K, 2700 K
  - LED Package Life time : 50,000 hours (25°C)
- \*LED package life time according to industry standard (LM80), high operating temperature may shorten life span of LED package and LED lamp.

## APPLICATION



Outdoor Sports Facilities



Port



Factory



Outdoor Parking Lot

