

LED HIGH BAY HB2510-200S

External Driver



- Convenient maintenance with external driver
- Clamping Technology applied LED high bay
- High luminous efficacy (140 lm/w)
- LED replacement for MH 600 W with 70% electricity saving
- Various cover options and mounting options are available
- Various beam angle are available with cover lens
- Ultraviolet free, no mercury and lead-free RoHS Compliance



SPECIFICATION

ELECTRICAL

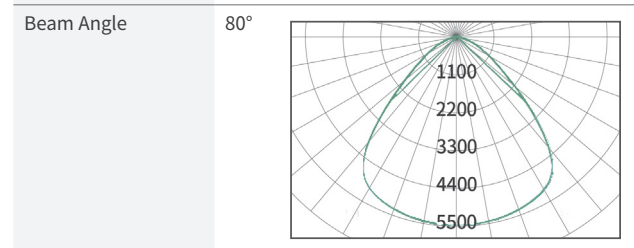
Wattage	200 W
Power Input	AC 100 - 240 V
Frequency	50/60 Hz
Power Factor (PF)	> 0.96
THD	< 10%
Protection Circuit	6 kV(L-N), 10kV(Line-FG)

CONSTRUCTION

Size	ø 276 x 215 mm
Weight	4 kg
Material	Polycarbonate, STS
Heatsink	Copper ICEPIPE Heatsink
Operating Temperature	-30°C ~ 50°C (-22°F ~ 122°F)
Installation Angle	360°

OPTICS


Lumen output	28,000 lm
Efficacy	140 lm/W
Replacement	MH 600 W
CCT	5,700 K
LED Package Life time	50,000 hours (25°C) *LED package life time according to industry standard (LM80). *High operating temperature may shorten life span of LED package and LED lamp.
CRI	80 Ra



ICEPIPE HEATSINK

Highly Efficient ICEPIPE heatsink

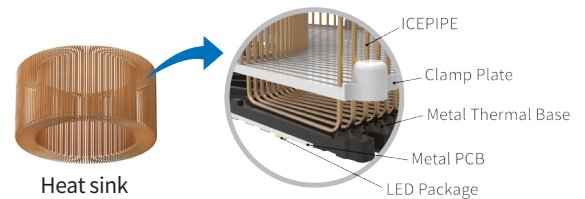ICEPIPE heatsink was created by our patented Fluid Dynamic Pressure Technology, which enables heat dissipation 200 times faster (40,000 W/m²·K) than that of conventional aluminum (Al) heatsink. Liquid circulation takes place inside the pipe, traveling through the coil and cooling down heat from the LEDs in the most efficient way.



- The fastest heat transfer rate
- Efficient air flow
- Uses light weight copper

APPLICATION




Factory



Swimming Pool









Gymnasium



Warehouse




COVER OPTIONS

Cover						
	Diffuser Cover	Cover Lens			Dome Diffuser	Reflector
LIGHT DISTRIBUTION CURVE						
Beam Angle	97°	35°	50°	110°	100° ± 15°	65°

INSTALLATION TYPE



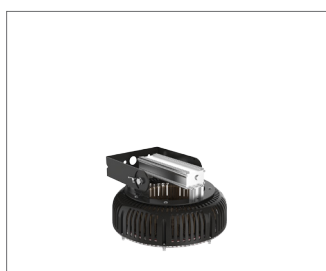Chain



Hinge Bracket

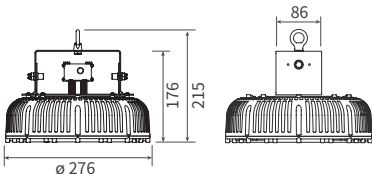




60D Hinge Bracket



90D Hinge Bracket

PACKING

Dimension	① Single Unit Box	② Pallet
(Unit : mm) · Size : $\varnothing 276 \times 215$ mm · Weight : 4 kg 	(Unit : mm) 	(Unit : mm) 

Type	① Single Unit Box	② Pallet	20ft Container-Palletized	Remarks
Quantity	1	72	720 (10 Pallets)	3R x 3R x 8L = 72 pcs
Dimension(mm)	320 x 320 x 230	1,100 x 1,100 x 1,990	5,500 x 2,200 x 1,990	
GWT(kg)	4.55	345	3,446	
CBM	0.023	2.36	23.60	

⚠ WARNINGS

- Do not use with direct current and ballast.
- Do not install the lamp in an enclosed place.
- Do not install on any other shade that is not provided by ICEPIPE.
- Please follow the recommended daily operating hours.
- Please read the instruction manual carefully before installation.



* Please refer to our full warranty terms and contact your sales representative for details.

