


원형직부등

10 W / 15 W

Z-CL



상시형




센서형



제품도면

- 규격 : $\phi 240 \times 62$ mm
- 무게 : 650 g

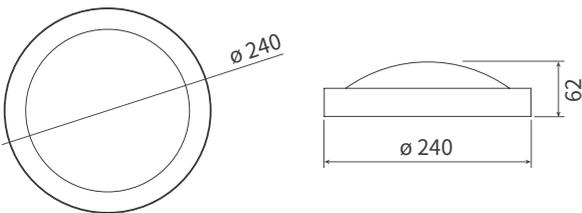

설치장소



현관



복도



계단



베란다

제품사양

구분	모델명	소비전력	광효율	총광속	연색성	색온도	정격전압	정격주파수
상시형	Z-CL-10e	10 W	≥ 100 lm/W	$\geq 1,000$ lm	≥ 80 Ra	5,700 K	220 VAC $\pm 10\%$	60 Hz
	Z-CL-15e	15W	≥ 105 lm/W	$\geq 1,575$ lm				
센서형	Z-CLS-10e	10W	≥ 100 lm/W	$\geq 1,000$ lm				

- 역률 (PF) : ≥ 0.95
- 외함 재질 : STEEL
- 커버 재질 : PC

- 형태 : 직부등
- 용도 : 상시 / 센서
- LED 칩 정격수명 : 50,000 시간 (상온 25°C 기준)
LED 칩 수명과 제품 수명은 차이가 있으며, 사용 온도가 높을 경우 수명이 짧아질 수 있습니다.

※ 센서형

- 감지 조도 : 350 ~ 750 lux / 대기 전력 : < 200 mW / 최대감지범위 : 3~5 m, 100°
- 점등 간 다른 동작이 감지되면, 센서 동작 중 타이머가 리셋됨
- 감지조도 항목은 주간, 야간 모드 중 '야간모드'에서만 적용됨